
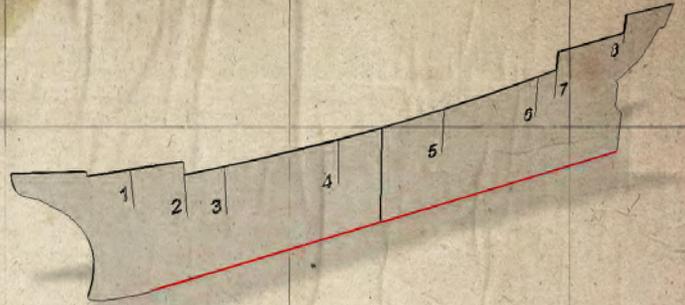



ASSASSIN'S
— CREED® IV —
BLACK FLAG™

SHIP ASSEMBLY DIAGRAM


1. Sandwich the inner support piece between folded keel piece and glue or tape together.

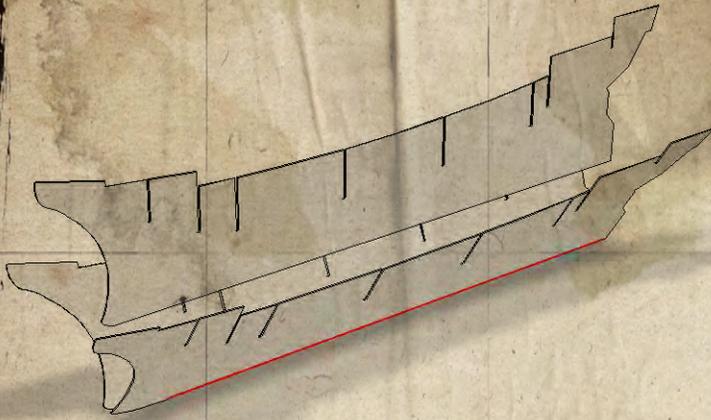


2. Put ribs into corresponding slot and secure in place with tape.

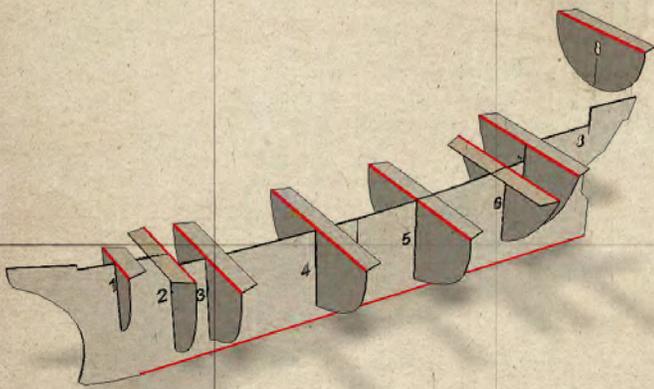


3. Glue or tape the deck onto the ribs and keel piece.

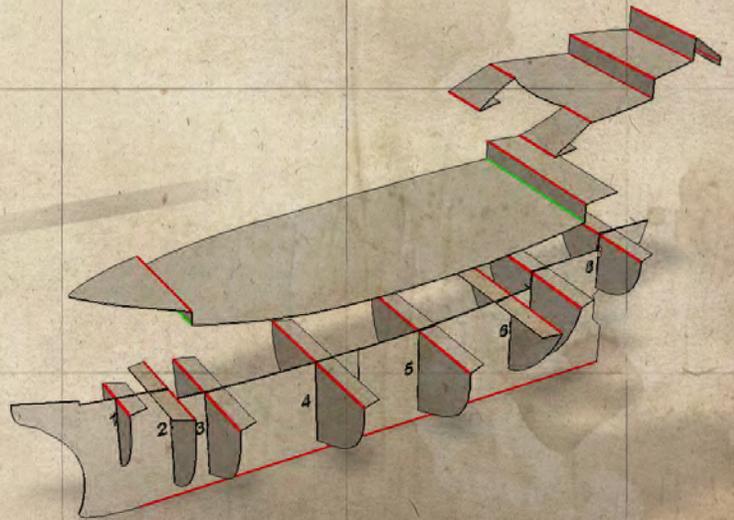


4. Apply Upper Deck
(do not glue stern panel - it will be done later)

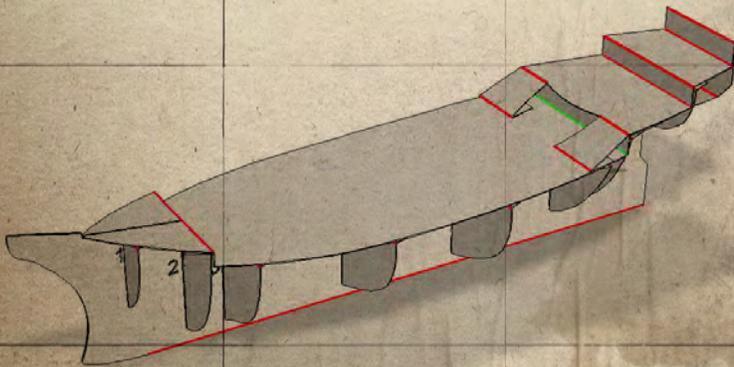

5. Cut left & right hull pieces on the black solid lines.

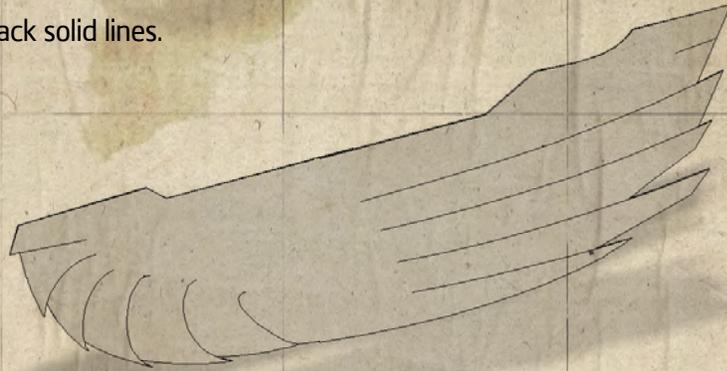


6. Overlap the cut strips of the hull to meet the guide line next to the cut and glue or tape the pieces to maintain the curve shape.

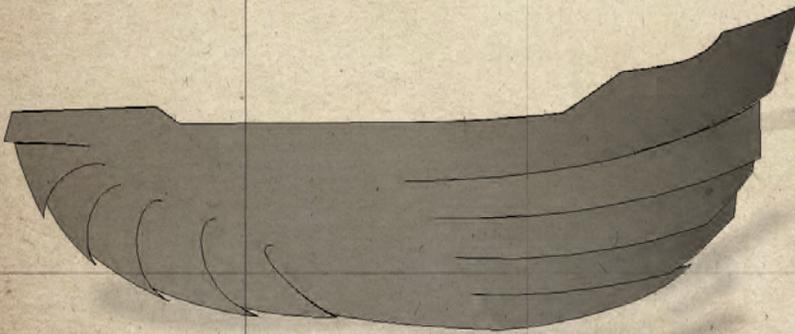

7. Apply one side of the hull to the deck starting at the front of the hull. Tape or glue the top edge of the hull while making sure the bottom edge meets up with the guide line on the keel.

8. After the top is secure, glue or tape the bottom of each hull to the keel. Glue the back end of the ship to cover the overlapping tips of the hull in back.

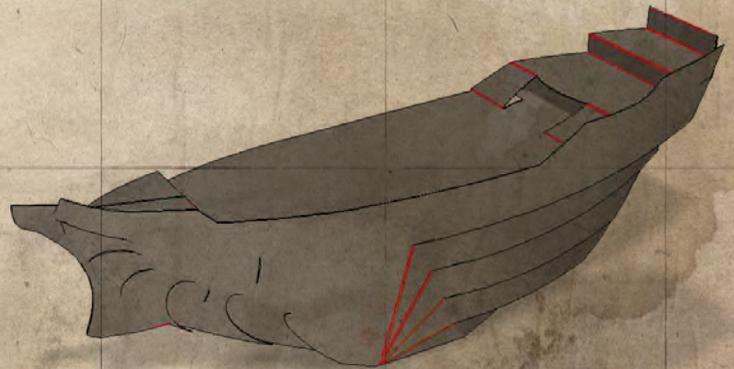

SHIP ASSEMBLY DIAGRAM (CONT)

Apply Masthead


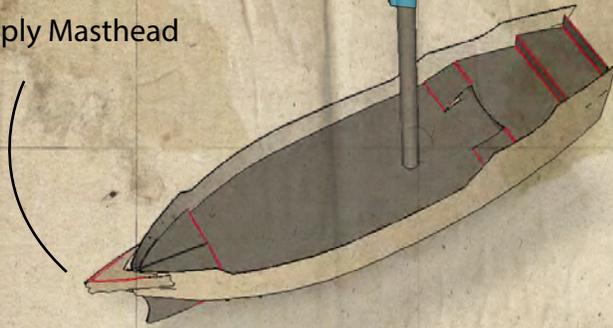


Exhibit A


Exhibit B

9. Masts: Either cut straws into 4" lengths and cover with the wooden-textured rectangle cut outs found on page 9, or roll the rectangle cut outs found on page 9 into 4" length cylinders. Overlap two ends by 3/4" and tape together as shown in Exhibit A. Cut four notches in the top of the mast to help hold the rigging as shown in Exhibit B. Line up the base of each mast with the guides on the deck and attach with glue or tape.

10. Cut a 4+3/4" piece of a Small Stir straw or Bamboo Skewer for the bowsprit spar.

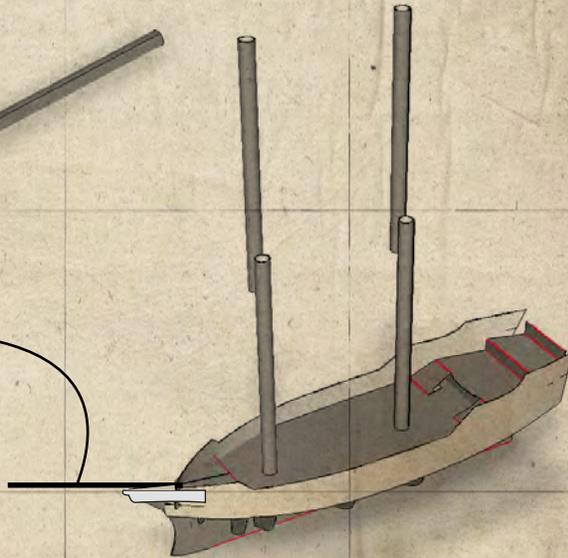

Transparent Tape

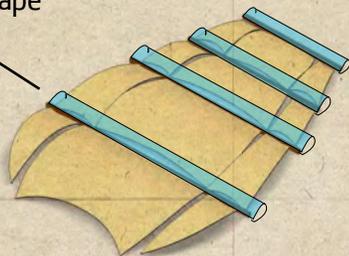

MAIN SAILS

11. If building the Jackdaw using standard printer paper, print both sets of the sails that are included in these instructions. Glue or tape the two sets to each other in their respective, separate pieces so that each sail is doubled up for reinforcement. If using card stock, only one set of sails needs to be used in assembly.

12. Arrange sails and secure each set to the spars with transparent tape as seen in the diagram titled Main Sails.

13. Once sail structure is assembled to match Main Sails diagram, attach entire structure to the ship masts. Hold structure up to the masts while wrapping tape around the masts and attaching to the sail structure in the middle of each row of sails as seen in Exhibit C.


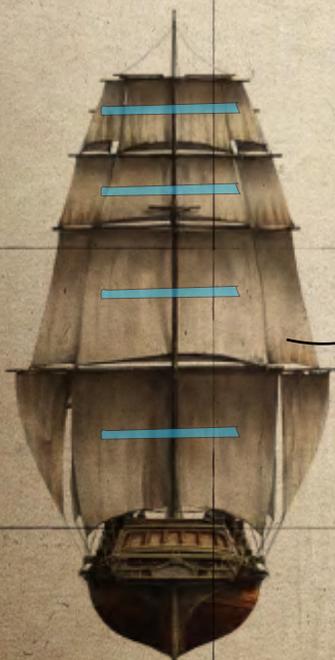


Exhibit C

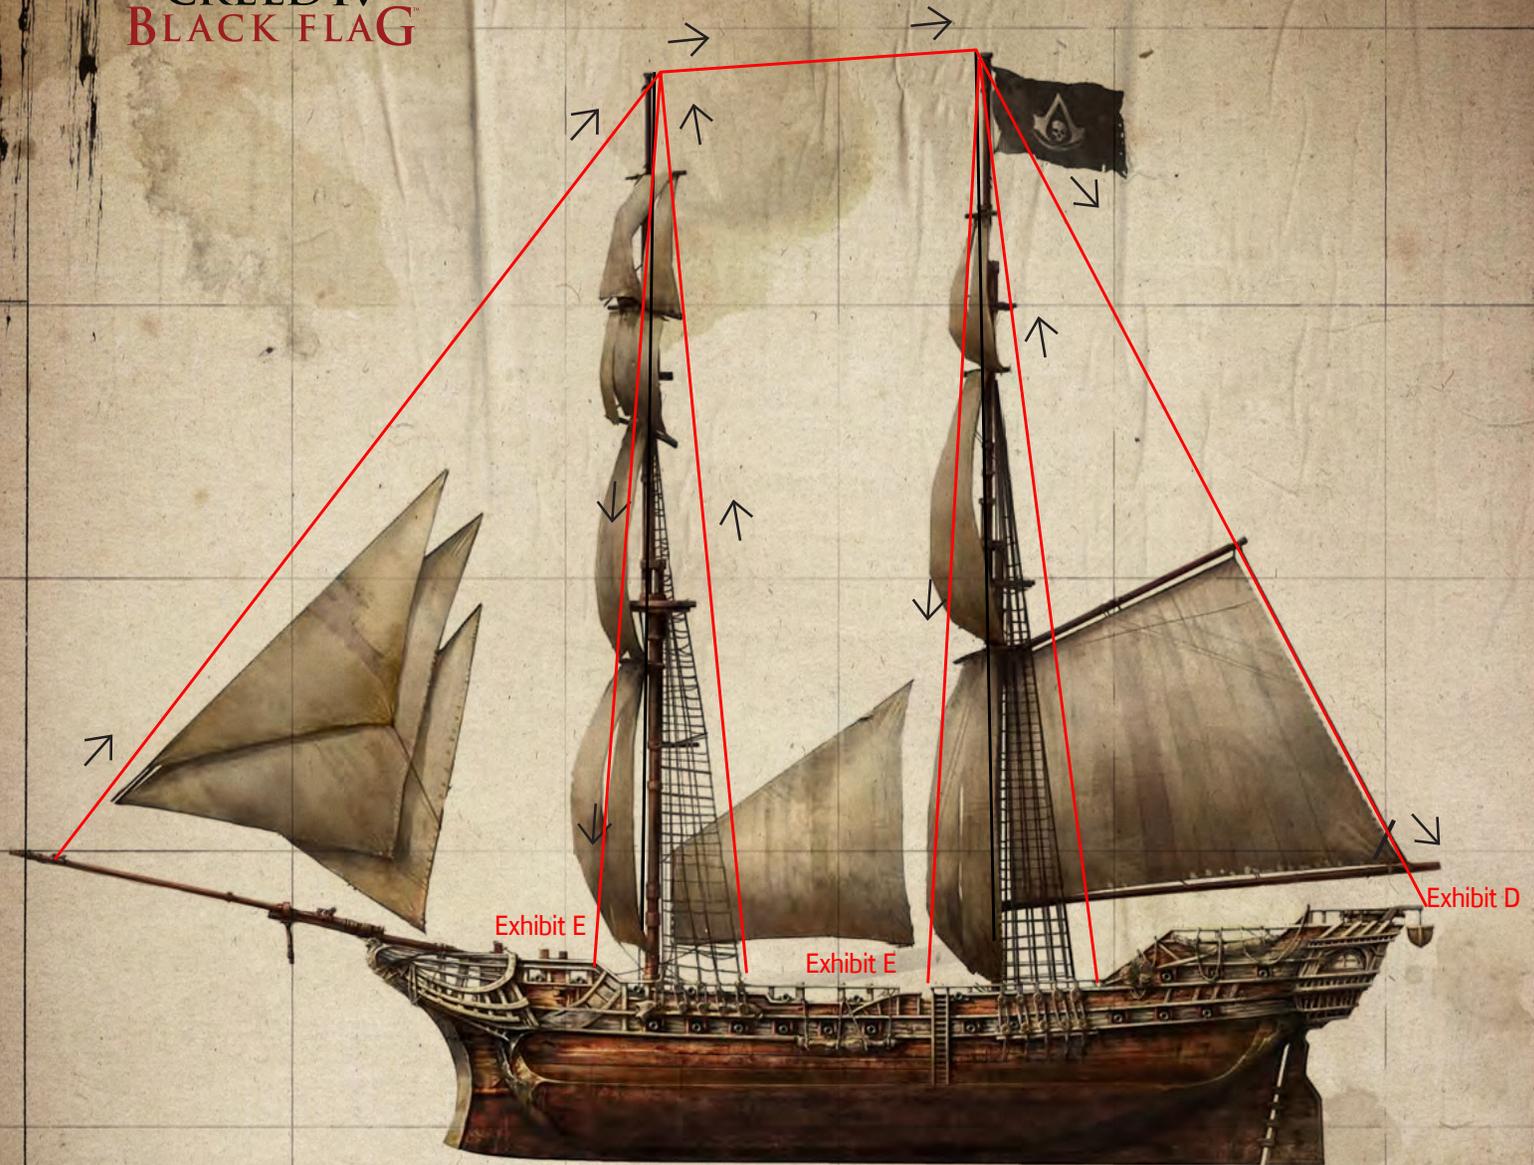


PRIMARY RIGGING

14. Using light-weight string for rigging, follow these steps and refer to diagram titled "Primary Rigging."

- A. Following the pattern in Exhibit D, tie rigging around bowsprit spar and string rigging over masts, laying them in the mast notches. Fasten the rigging to the stern of the ship making sure the rigging is taut.
- B. Following the pattern in Exhibit E, attach rigging to the port side of the boat (left side when facing forward) to starboard side of the boat (right side when facing forward) with glue or tape. Make sure to string rigging through the opposite mast notches as the ones in step 14A and pull rigging taut.

SECONDARY RIGGING

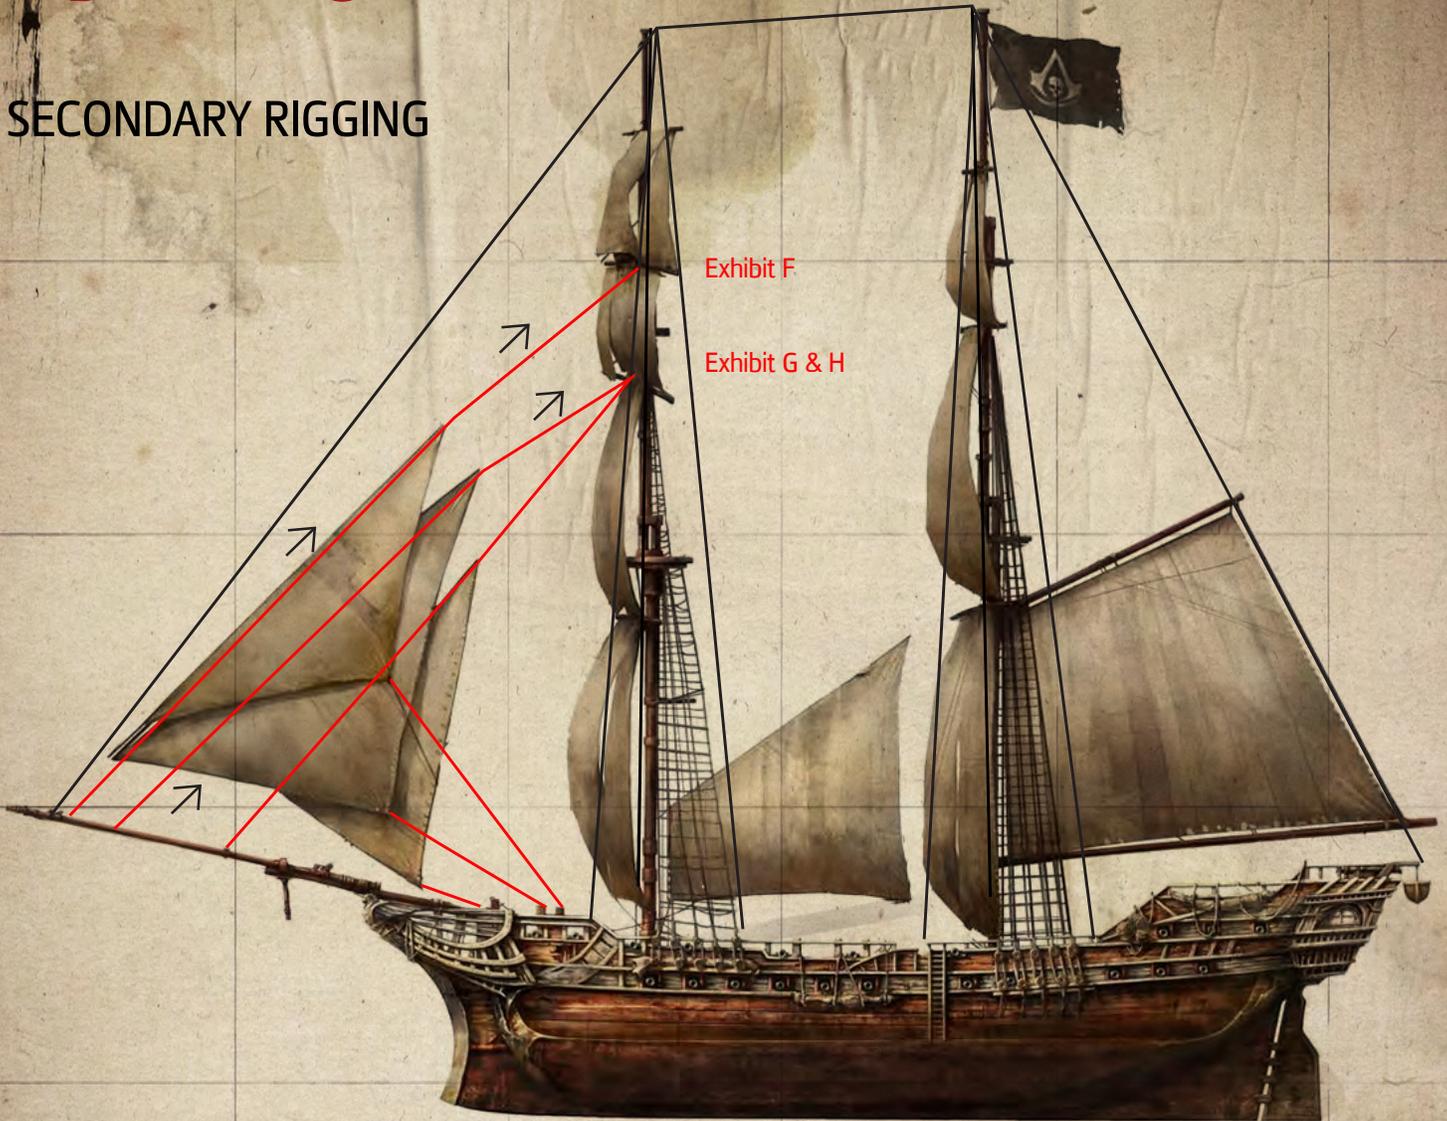


15. Using light-weight string for rigging, follow these steps and refer to the diagram "Secondary Rigging."

A. Following the pattern and attaching points found in Exhibit F, tie rigging around the bowsprit spar and attach to the mast closest to the bow of the ship by wrapping the string around the mast. Tape sail titled "Jib Topsail" to rigging as shown in diagram. Attach bottom of the jib topsail to deck of the ship using string as rigging as show in diagram.

B. Repeat steps in 15A to attach rigging and sail titled "Jib" to mast closest to the bow of the ship and to the deck of the ship. Refer to Exhibit G for rigging pattern and attach points.

C. Repeat steps in 15A to attach rigging and sail titled "Jib Staysail" to mast closest to the bow of the ship and to the deck of the ship. Refer to Exhibit H for rigging pattern and attach points.

SECONDARY RIGGING

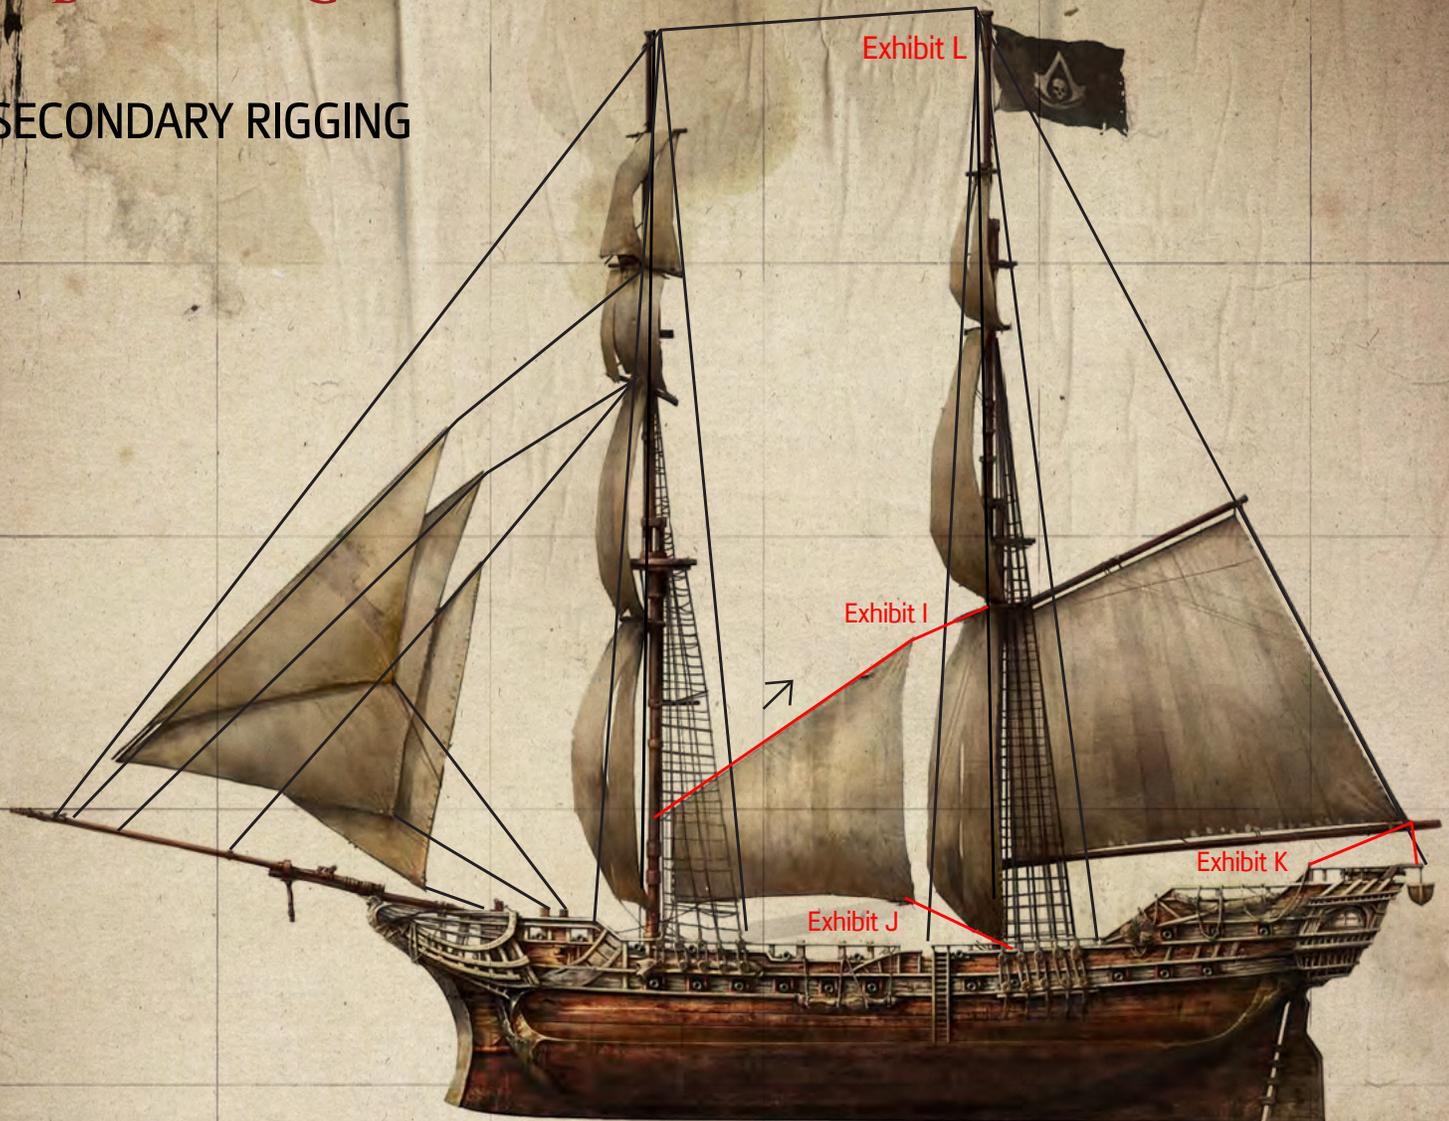

15. (Continue referencing diagram "Secondary Rigging") Following the pattern found in Exhibit I, wrap rigging around the mast closest to the bow of the ship. Pull rigging taut and attach the mast closest to the stern of the ship with tape. Attach sail titled "Fore Sail" to rigging as show in diagram. Attach rigging to corner of sail with tape as seen in diagram. Follow pattern found in Exhibit J, pull rigging taut, and attach to the deck of the ship.

16. (Continue referencing diagram "Secondary Rigging") Attach sail titled "Try Sail" to it's rigging spars. Taped the tri-sail to the mast without the rigging spars if they add to much weight. Attach rigging spars to the mast closest to the stern of the boat as seen in the diagram. Following the pattern found in Exhibit K, attach rigging to the inside of the port side of the boat (left side when facing forward) with tape. Wrap it around the bottom rigging spar, pull taut, and attach to the inside of the starboard side of the ship with tape.

17. Attach the Assassin's Creed 4 flag to the mast that is closest to the stern of the ship with tape. See Exhibit L for reference.


ASSASSIN'S CREED IV BLACK FLAG

STAND ASSEMBLY DIAGRAM

1.



2.

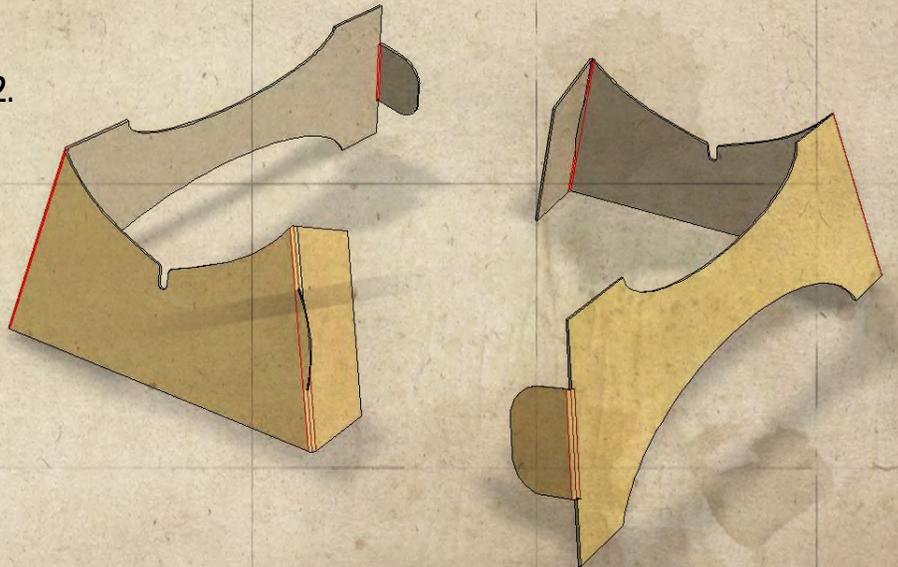


3.




DECK & MASTS

- CUT
- - - FOLD
- · - · - GUIDE

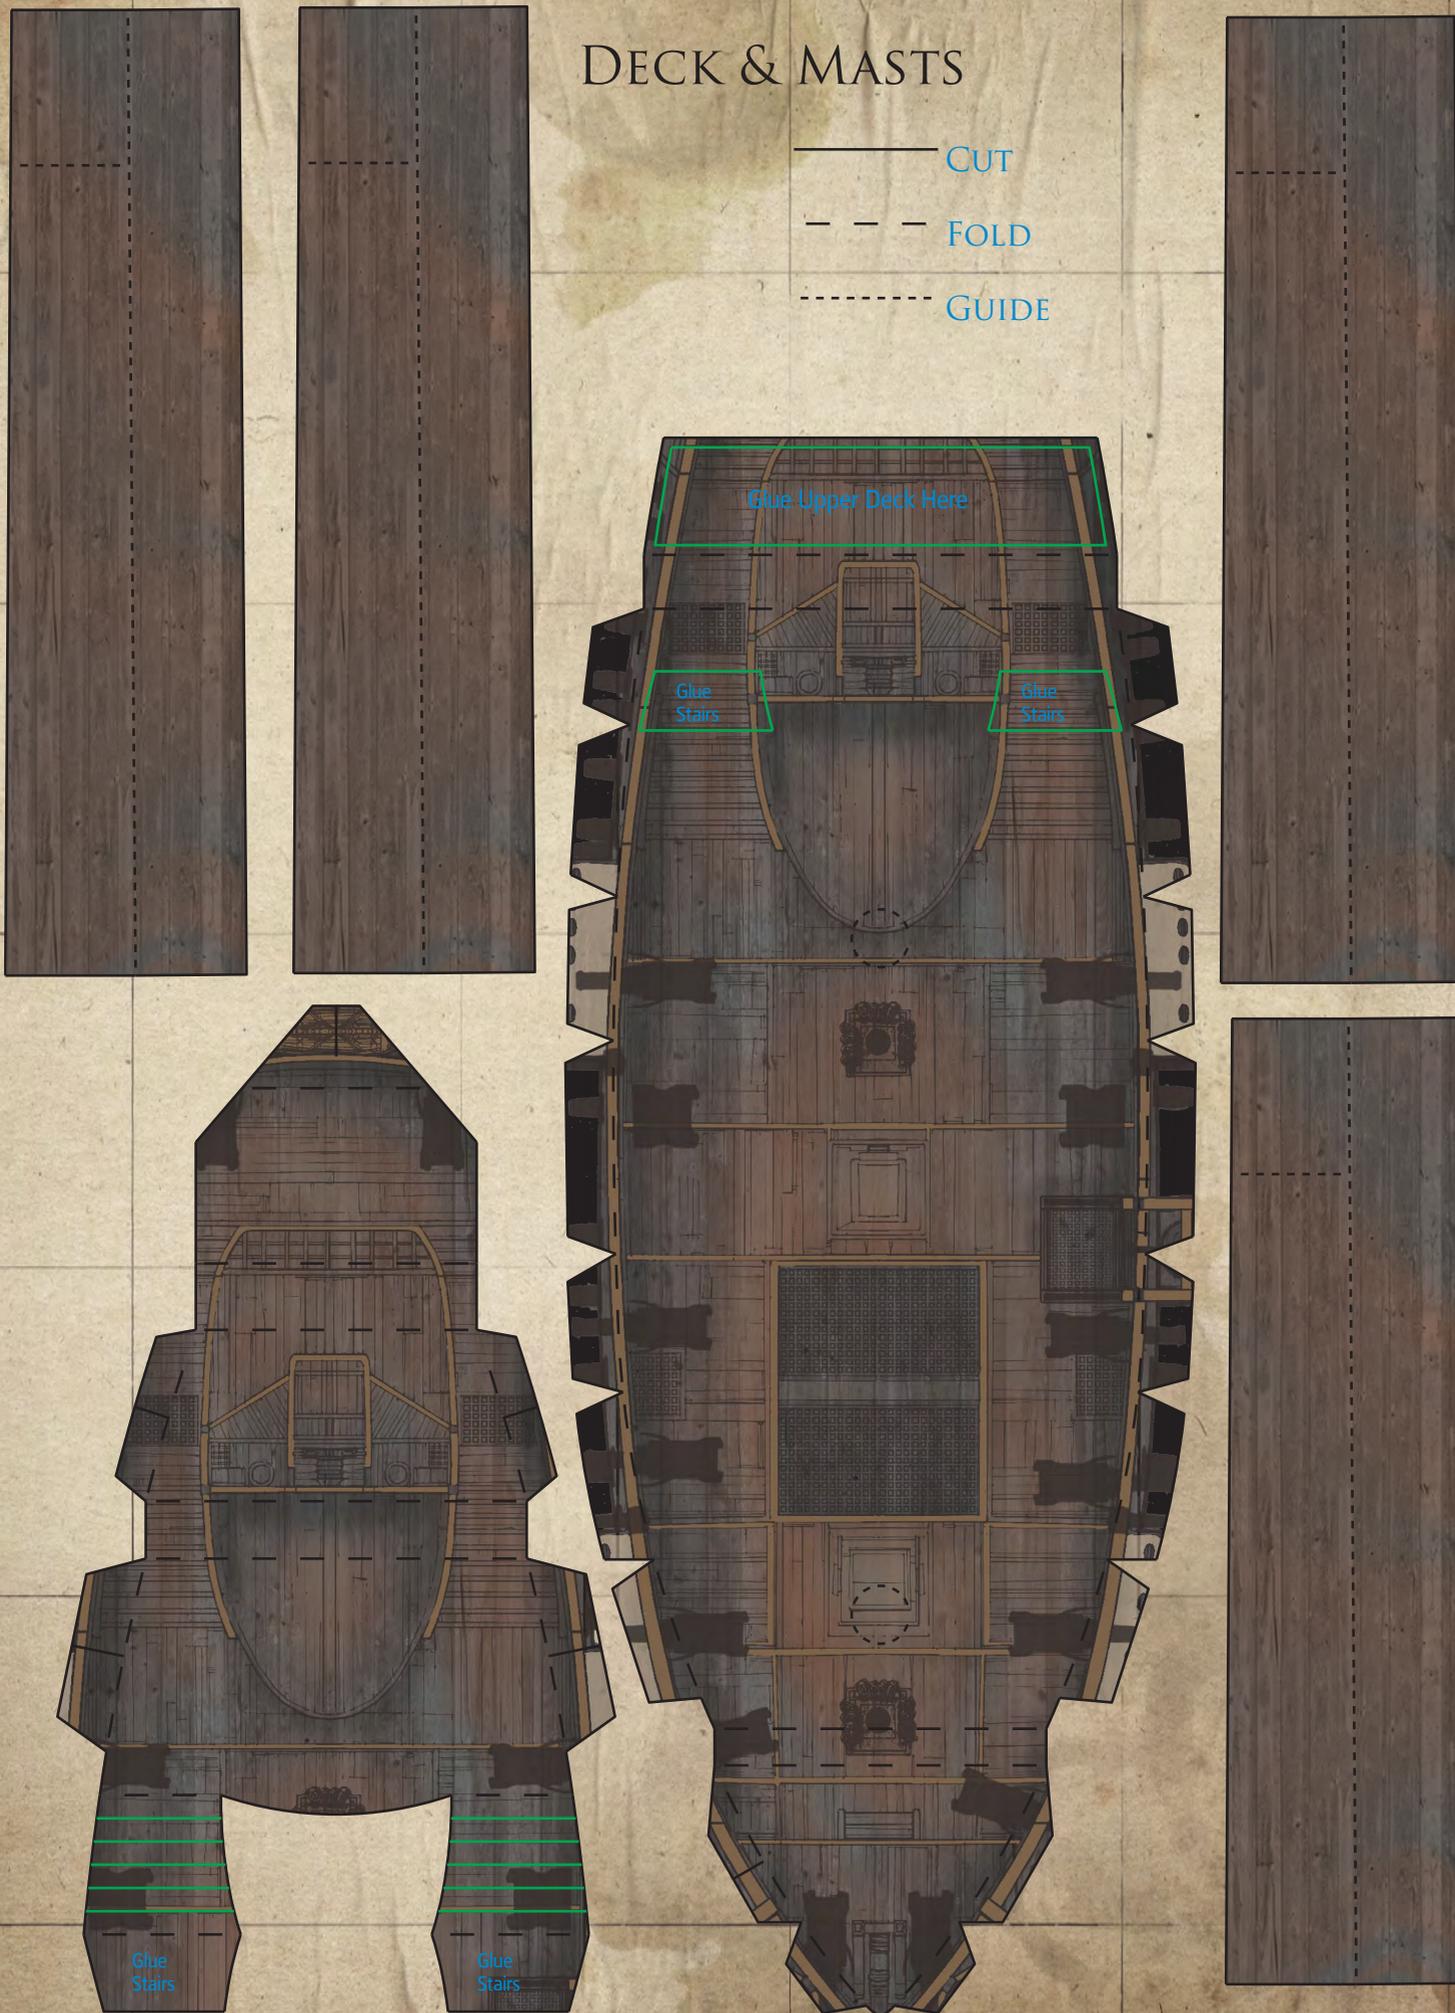

HULL

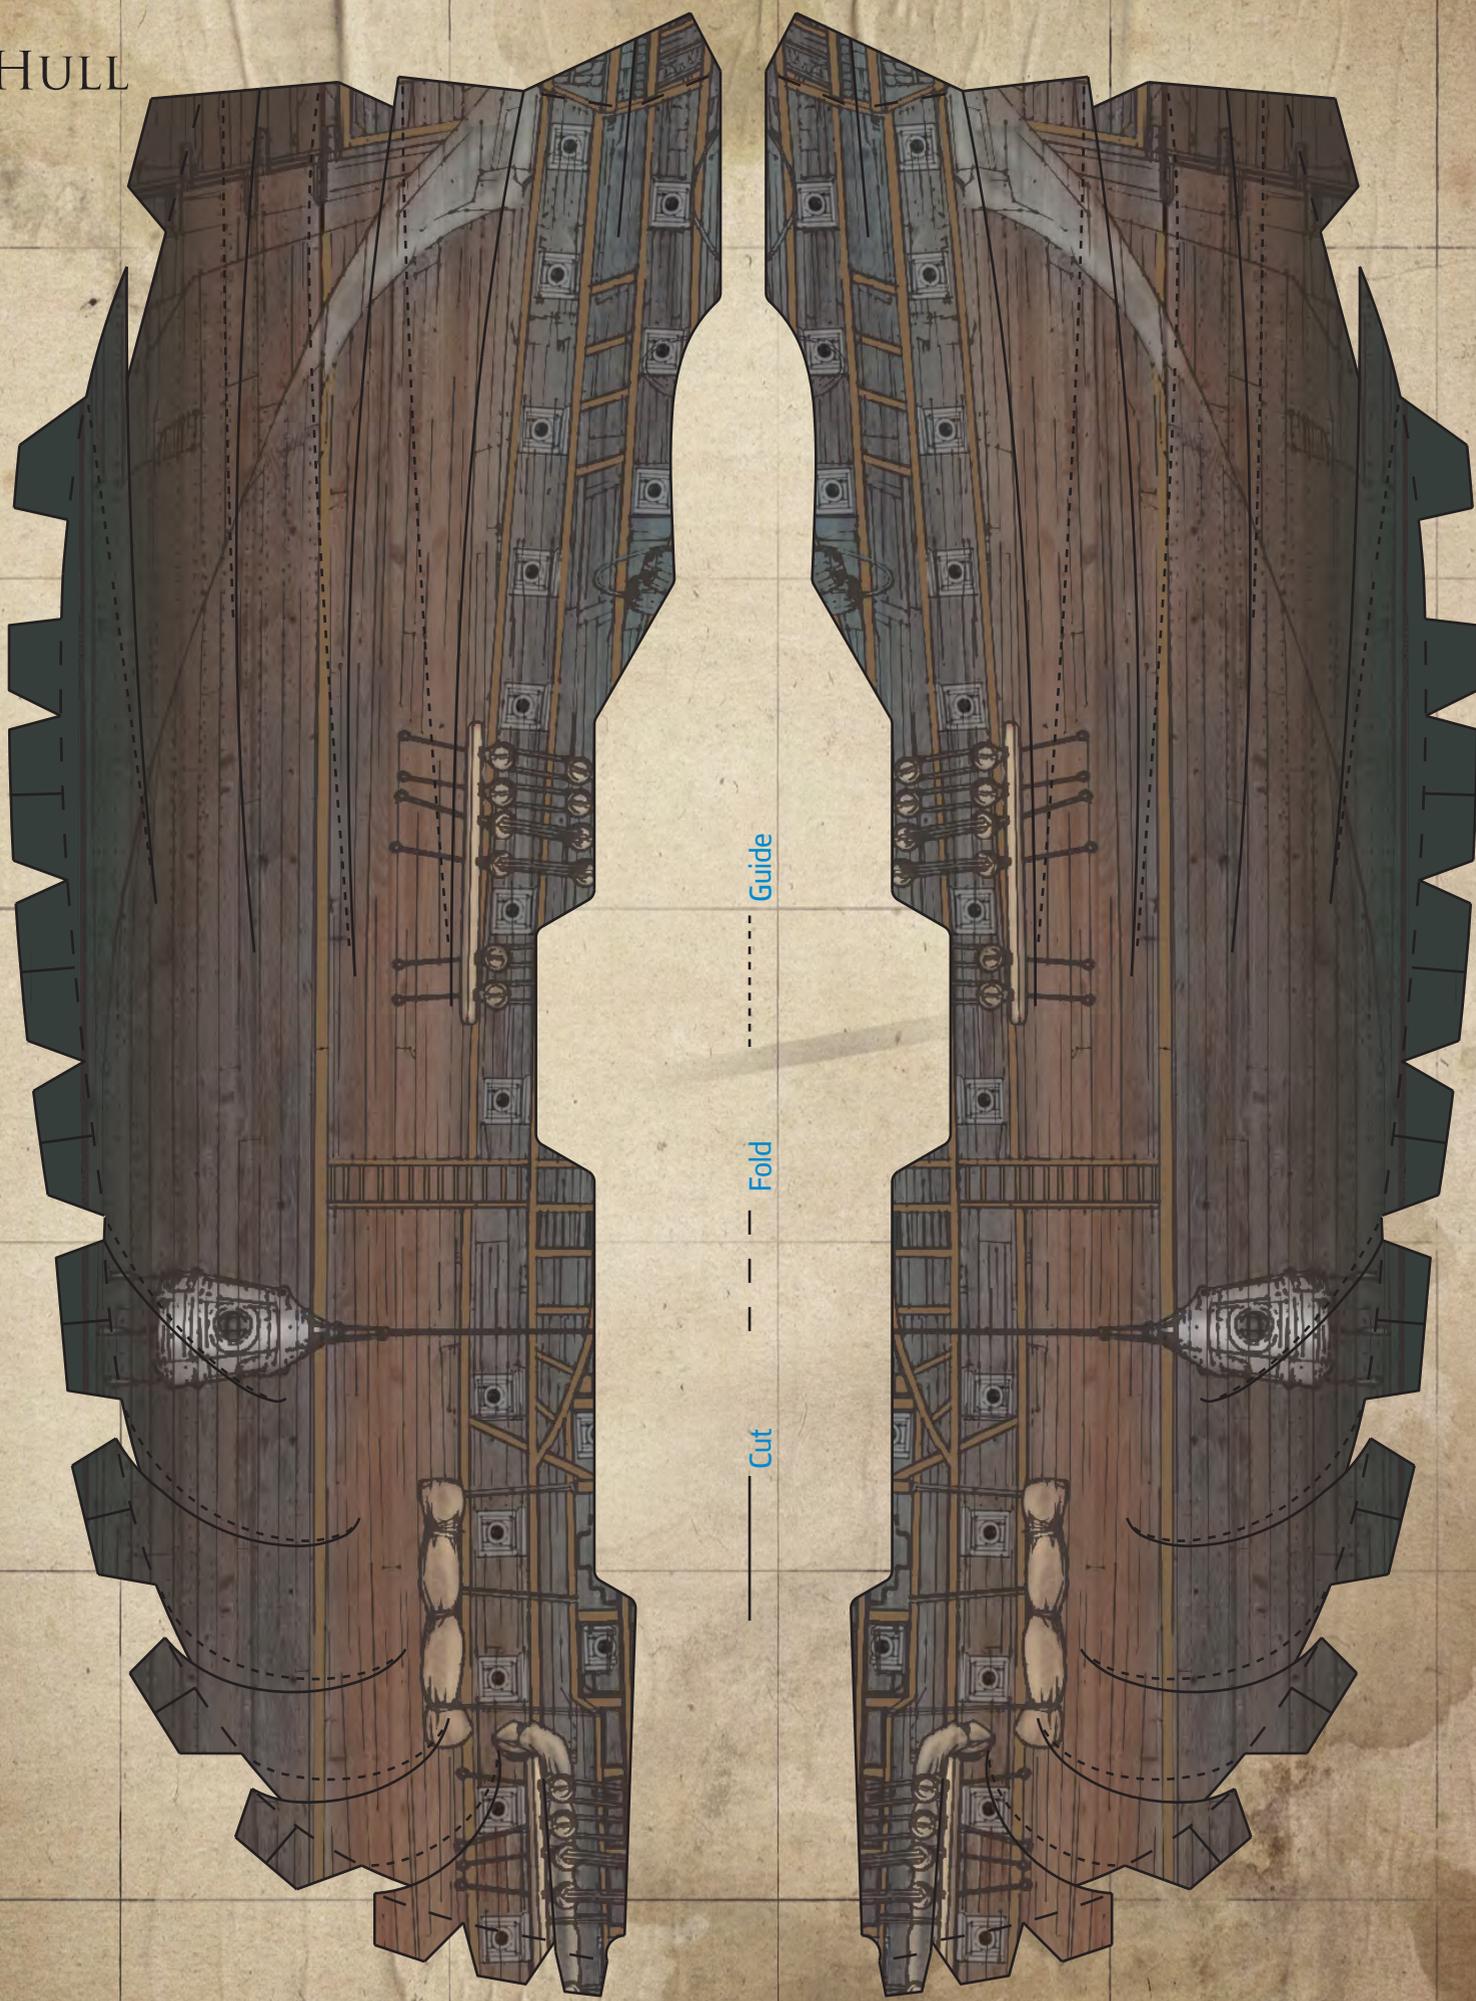


Guide

Fold

Cut

KEEL SECTION

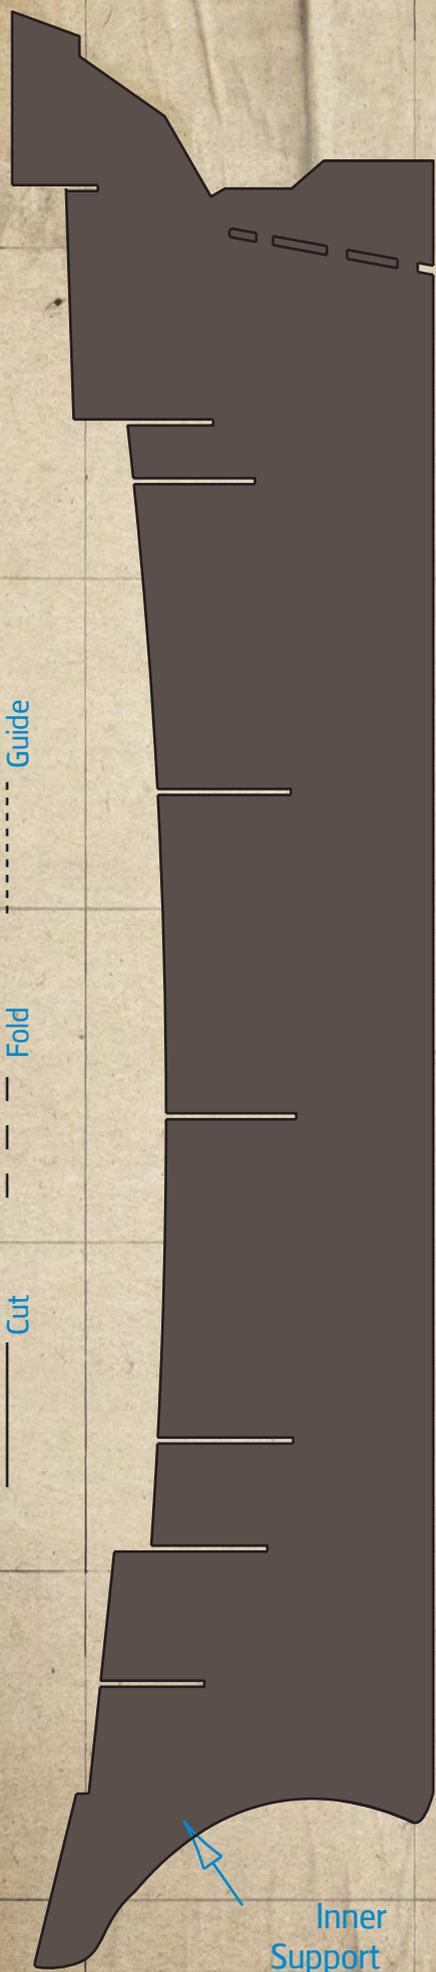


Guide

Fold

Cut





Inner
Support
Piece

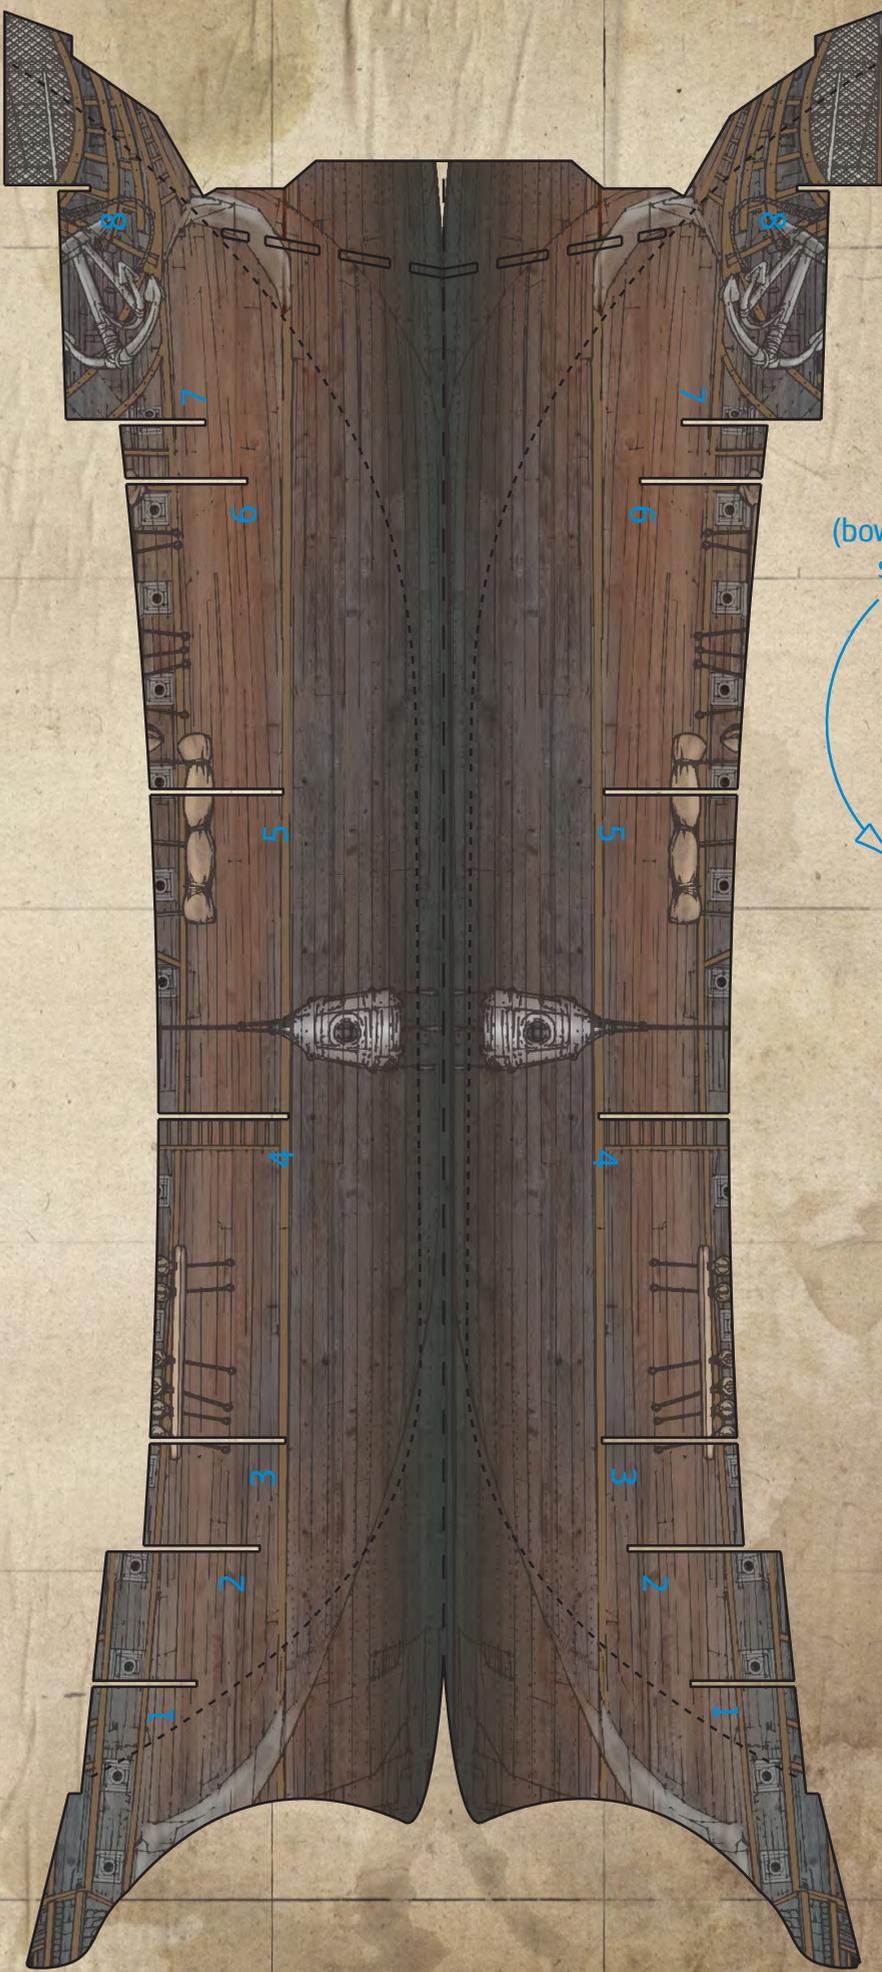

(bowsprit
spar)


STAND & MASTHEADS

- Cut
- Fold
- Guide

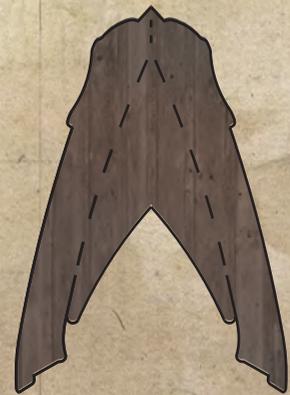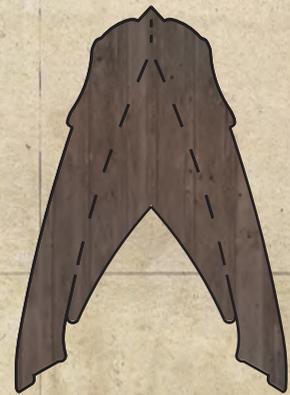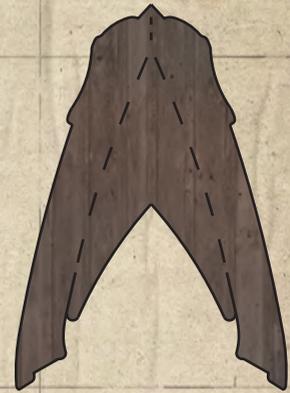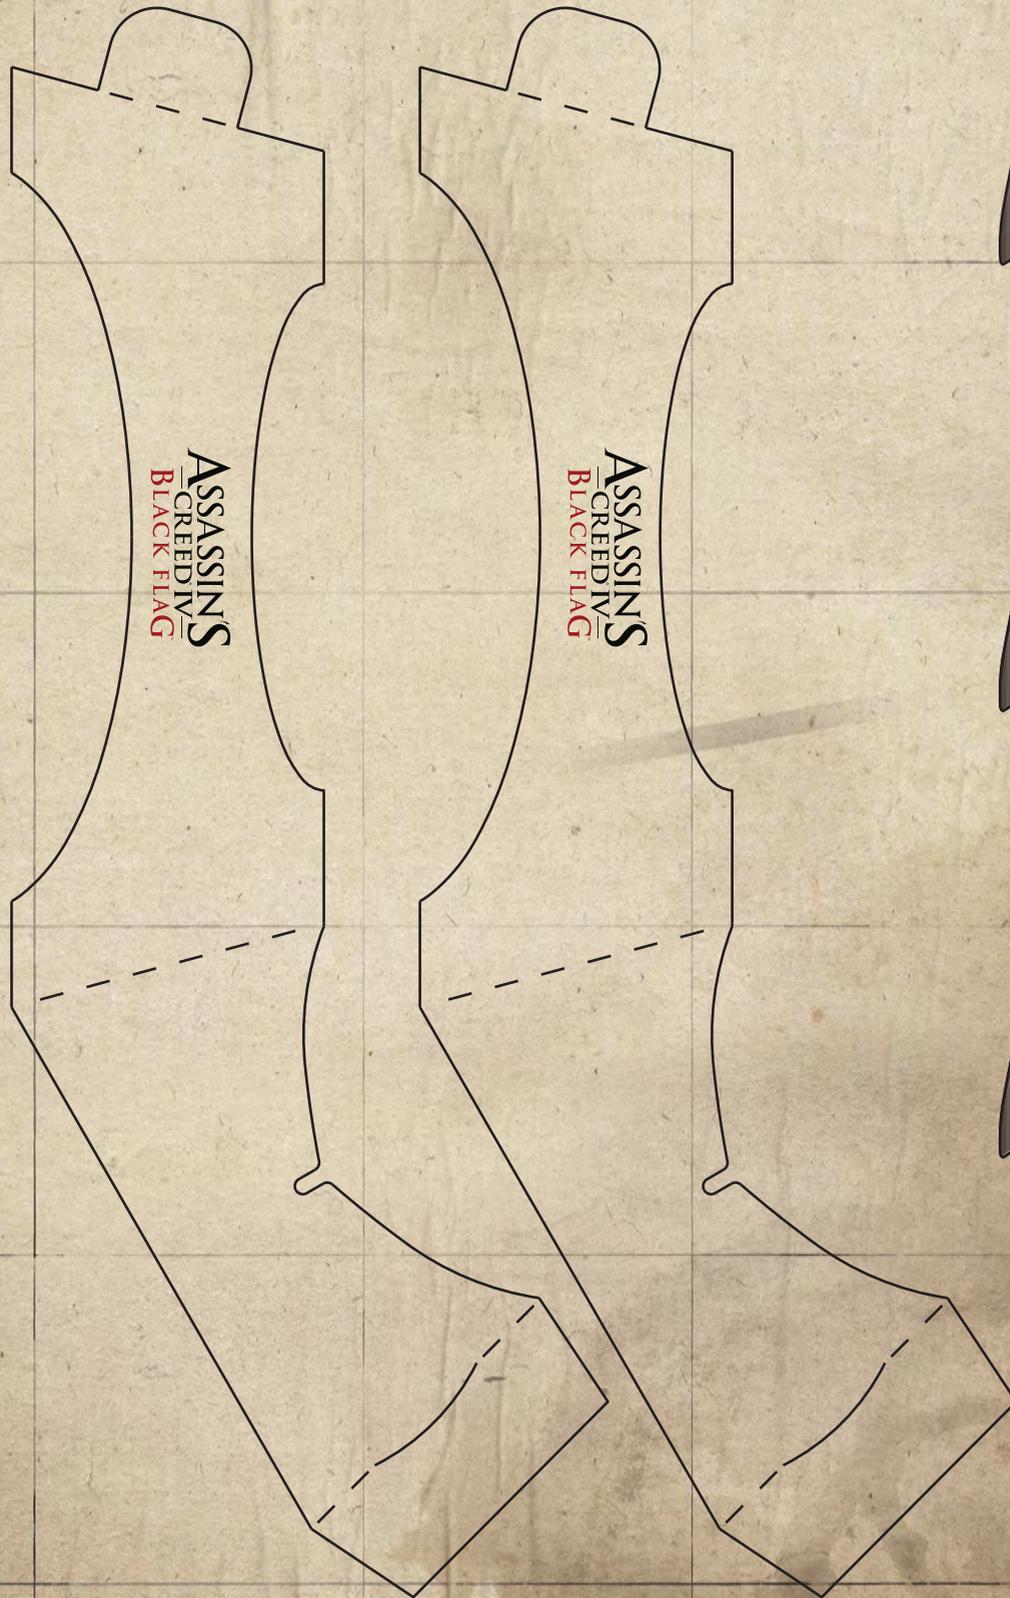


MAIN SAILS (2 SETS)

- Cut
- - - Fold
- - - - Guide

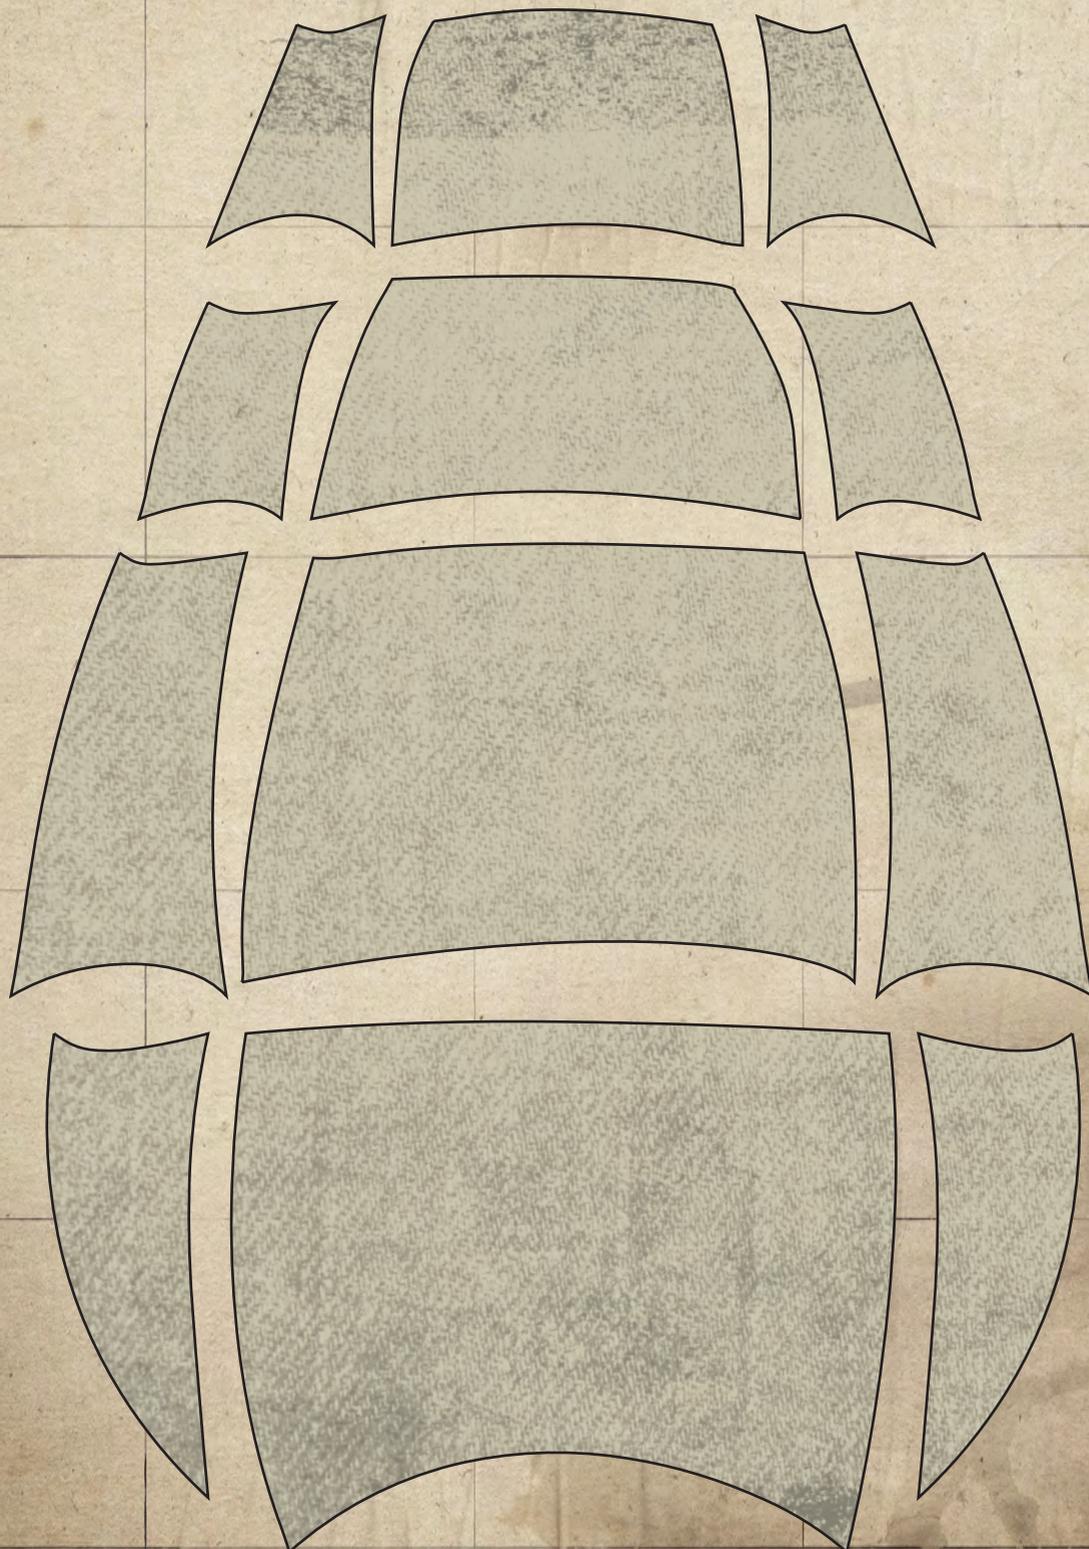


Rigging
Spars

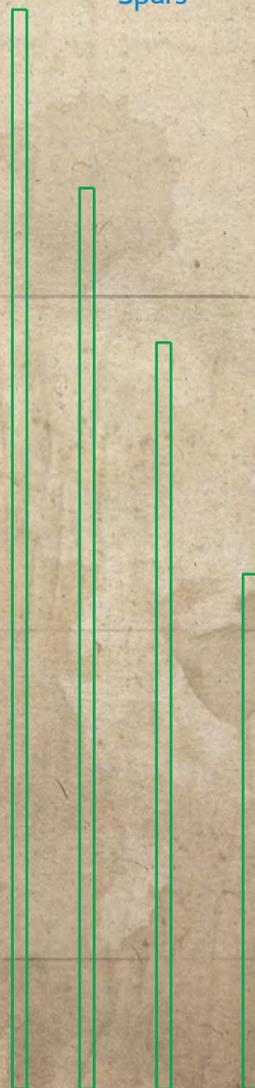


MAIN SAILS (2 SETS)

- Cut
- - - Fold
- - - - Guide

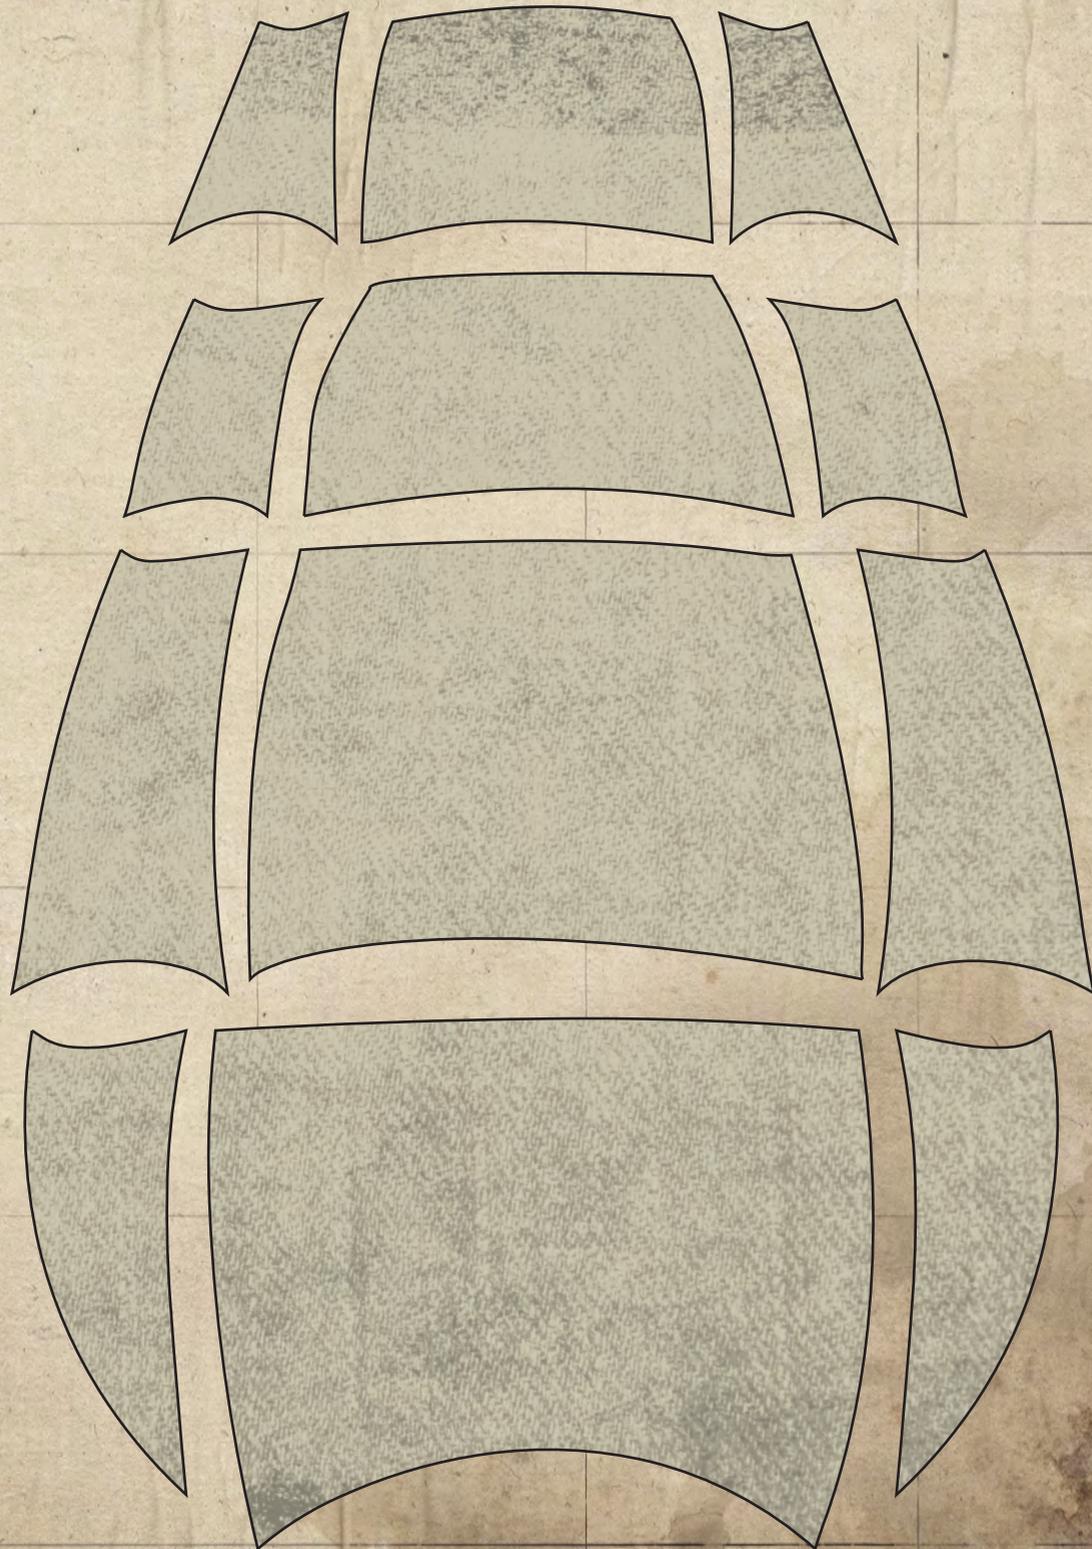


Rigging
Spars

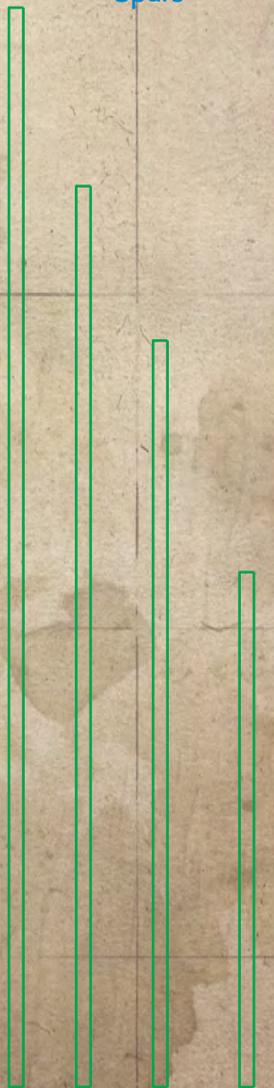

SECONDARY SAILS

- Cut
- - - Fold
- · · Guide

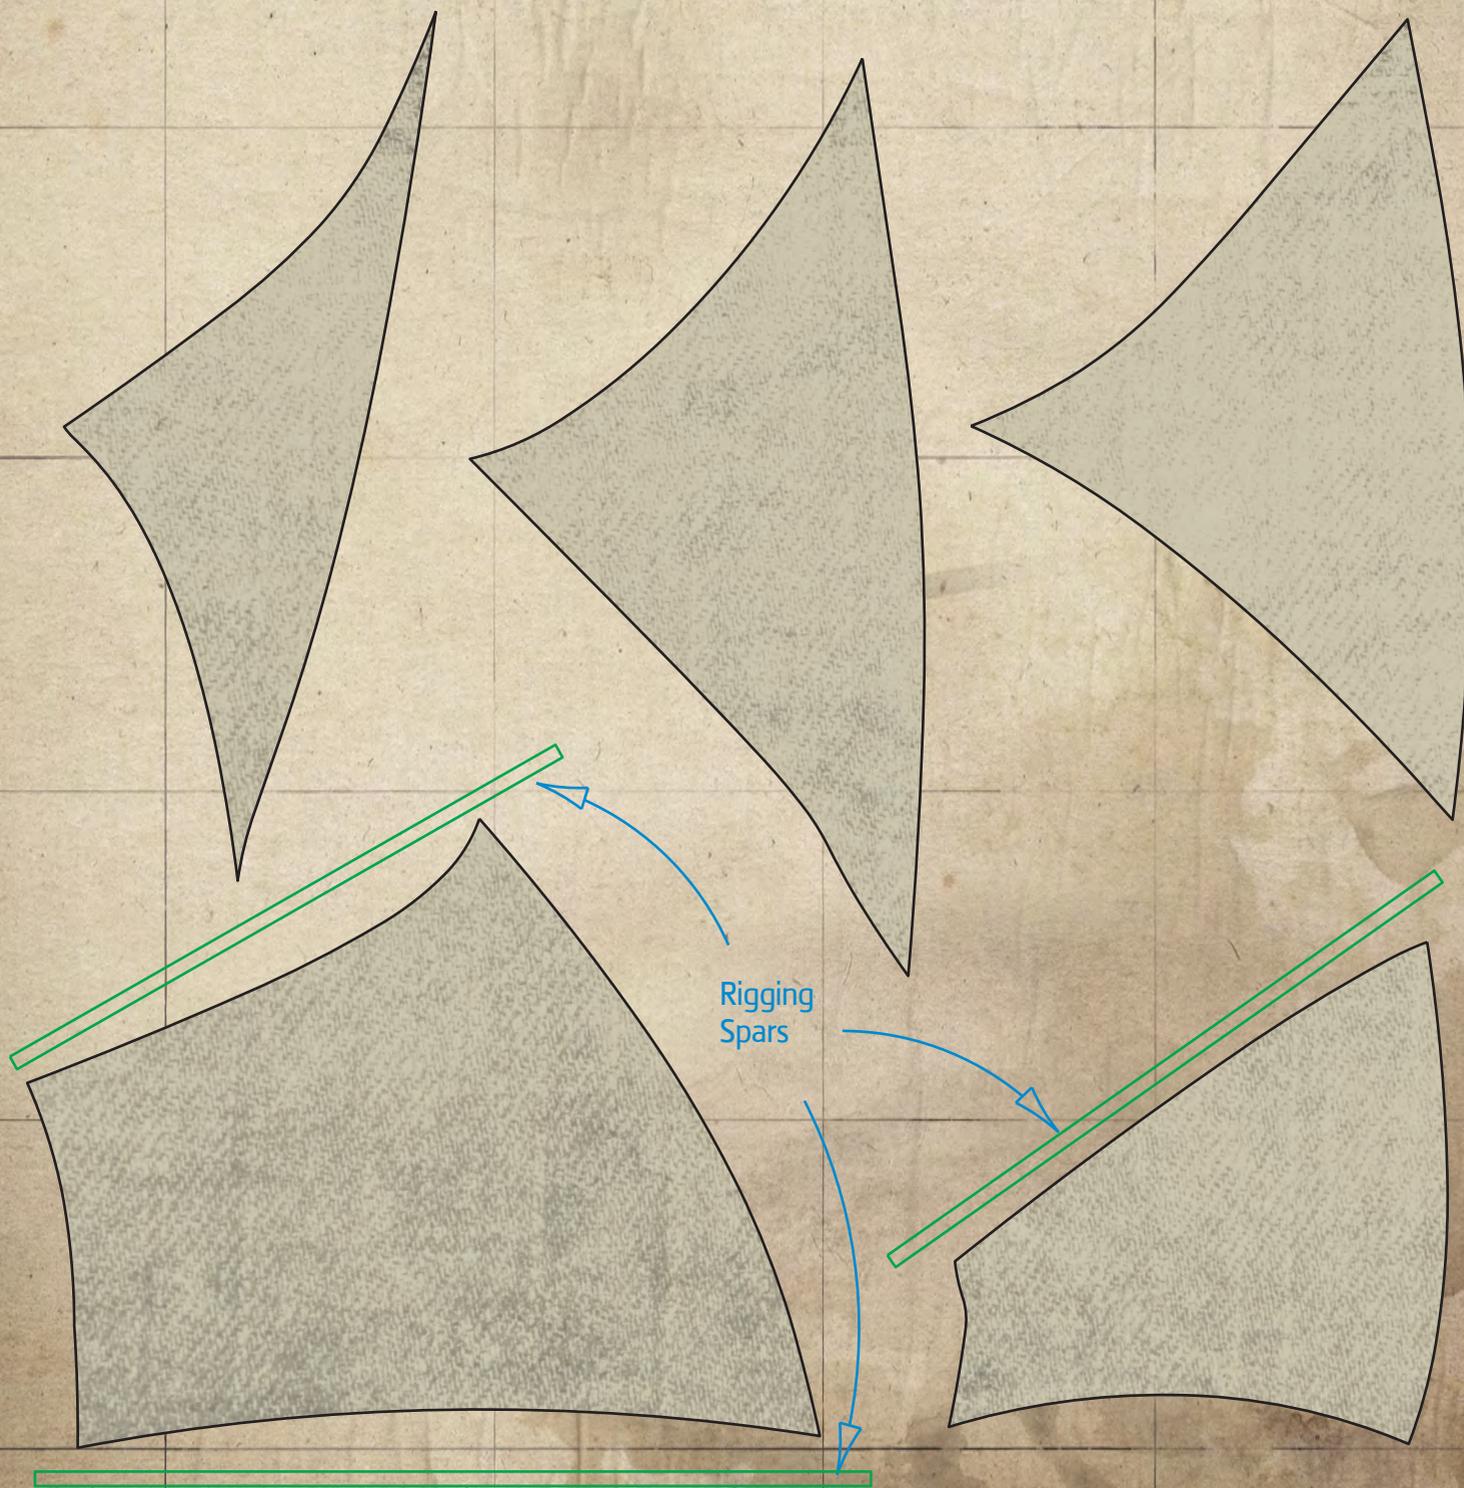

SECONDARY
SAILS

- Cut
- - - Fold
- · · Guide



Rigging
Spars

CROSS RIBS

— Cut
- - - Fold
- - - Guidé

